STEAMIST®

Steam Generator

Models: SMP-5, SMP-7 and SMP-10

Features

Limited lifetime warranty - 2-year in home labor warranty where available

Generator typically can be installed up to 50 ft. from the bathing area

Diagnostic LED Displays

Stainless Steel Construction

Solid-State Circuitry


Codes/Standards

UL 499

UL/CUL Listed

City of LA - Approved

City of New York - M.E.A. Approved



Steam Generator Specification Chart					
Product Number	KW Rating	Max. Cu. Ft. Range*	Volts/Phase/ Max. Amps	Line Fuse	Dimensions L x W x H
SMP-5	5	100	240/1/21	30	15" x 6" x 15.5"
SMP-5-208			208/1/24	30	
SMP-7	7.5	250	240/1/31	40	
SMP-7-208			208/1/36	50	
SMP-10	10	450	240/1/42	50	
SMP-10-208			208/1/48	60	

^{*} Refer to sizing guidelines to accurately determine the proper size generator for the installation.
90°C copper wire is required for generator connection. Installation shall be in accordance with NEC and local electrical codes.

Required Equipment

TSC Control

Required Electrical Service

Dedicated circuit required: See Specification Chart for proper electrical requirements

Product Information

Water Supply - %" Compression Fitting, 120 PSI Max

Steam Line - 3/4" Brass NPT male thread

Pressure Relief Valve - 3/4" NPT female thread

Capped 1/2" drain line - Auto Drain Ready

Supplied with a 35' multi-conductor control cable

Generator

Weight - 30 lbs.

Installation Notes

Steam Generators can be typically mounted within 50 ft. of the bathing area.

Steam Generators should be accessible for service.


Do NOT install near flammable material such as paints, thinners, gasoline, etc.

Steam generators must NOT be installed outdoors, in moist, humid areas, in areas prone to freezing, or extreme heat such as an unventilated attic. To do so will void the warranty.

Steamhead to be mounted 12" to 18" above floor or 6" above rim of tub and as far from the seating area as possible.

Rough-in Notes

Access: 21" W x 18" D x 22" H (28" W with Auto Drain)

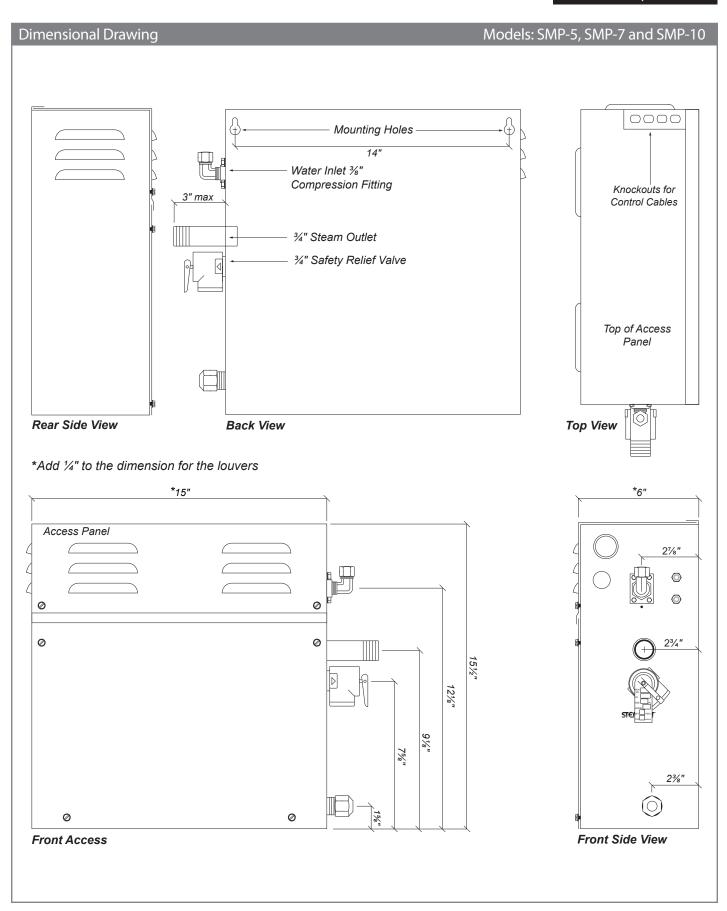

STEMMIST

East Coast Office: 25 E. Union Ave., East Rutherford, NJ 07073 • Tel: 800-577-6478 • Fax: 201-933-0746

West Coast Office: Tel: 800-355 (478 5 5 6875) West Coast Office: Tel: 800-355-6478 • Fax: 661-940-1617

- 2 -01/17 Pub. No. 234-A